


SYSTEM ACCESSORIES

Our compressed air system accessories provide all the equipment you require for the initial build and any ongoing operational support.



FIT FOR PURPOSE


Our system accessories are designed to tailor fit the Infinity pipework range. Choose from clips, brackets & clamps, couplings, fittings and valves to blow guns and hose reels.



Notes:

90815


PIPE CLIP TECHNOPOLYMERIC (Ø 20-25-32-40-50-63)




Code	Pipe Ø	A	B	C
90815 20	20	15	35.5	26
90815 25	25	17	39.5	26
90815 32	32	20	44.5	40
90815 40	40	24.5	53.5	40
90815 50	50	30	62	54
90815 63	63	36	73.5	54

90817

SPACER FOR PIPE CLIP TECHNOPOLYMERIC




Code	C
90817	14

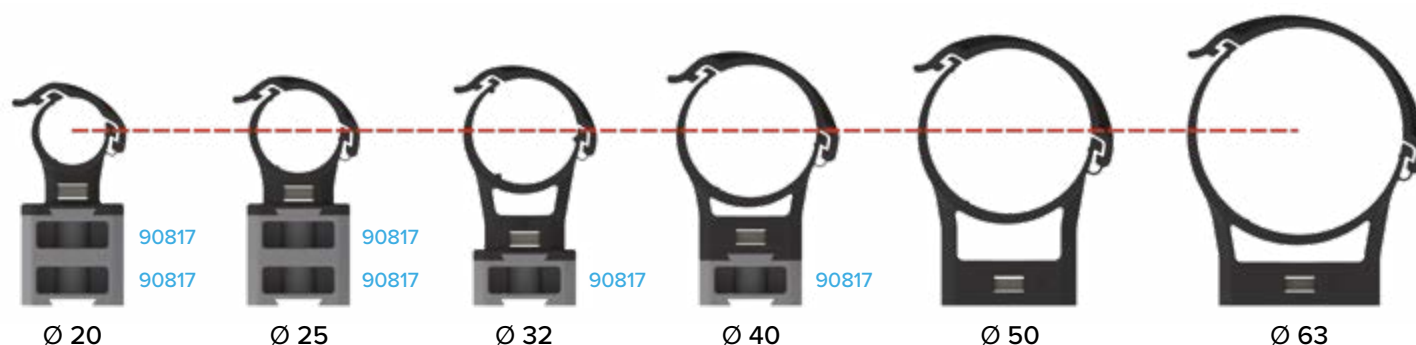

SYSTEM ACCESSORIES


Notes:

90820 RUBBER-LINED METAL PIPE CLIP (Ø 20-25-32-40-50-63)



Code	Pipe Ø	H	A
90820 20	20	M8/M10	36
90820 25	25	M8/M10	38
90820 32	32	M8/M10	42
90820 40	40	M8/M10	47
90820 50	50	M8/M10	52
90820 63	63	M8/M10	56


90820 RUBBER-LINED METAL PIPE CLIP (Ø 80-110-168)



Code	Pipe Ø	H	A
90820 80	80	M8/M10	64
90820 110	110	M8/M10	79
90820 168	168	M10/M12	114


COLLAR POSITIONS ASSEMBLING 90820 PIPE CLIPS

- The installer must follow all the national and local codes for securing the piping system
- Recommended collar positioning to secure Infinity pipes illustrated (right)

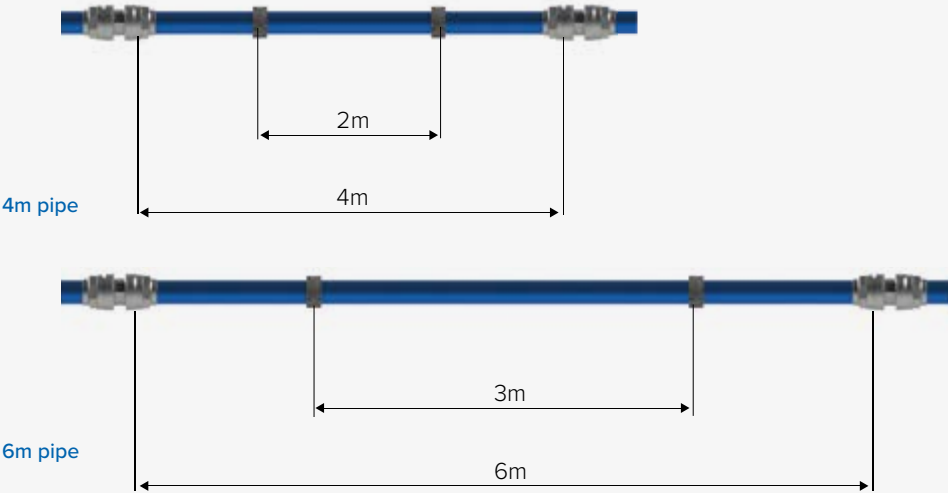


Notes:

90830 HANGING BRACKET

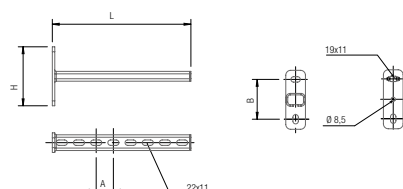




Code	A	B	H	L
90830	35	81	120	280

90860 GIRDER CLAMP (M10)



Code	M	K
90860	Ø 10mm	Int Ø 10mm

CLAMP POSITIONS ASSEMBLING 90860 GIRDER CLAMPS

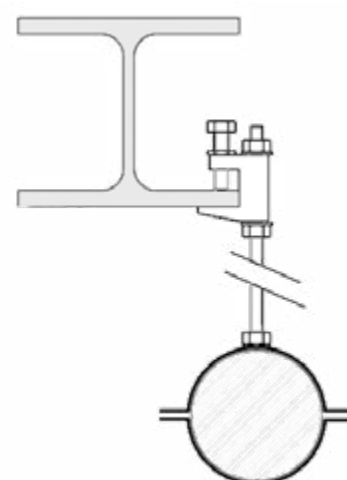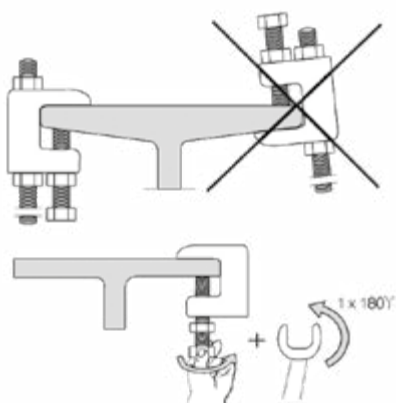

SYSTEM ACCESSORIES

Notes:

261AC EUROPEAN PROBE STEEL MALE PLUG



Code	Size (inches)
261AC 1/4	1/4
261AC 3/8	3/8
261AC 1/2	1/2

262AC EUROPEAN PROBE STEEL FEMALE PLUG



Code	Size (inches)
262AC 1/4	1/4
262AC 3/8	3/8
262AC 1/2	1/2

265AC EUROPEAN PROBE STEEL WITH HOSETAIL



Code	Size (mm)
265AC 6	6
265AC 8	8
265AC 10	10
265AC 12	12

Notes:

661

EUROPEAN SAFETY COUPLING
BSP MALE SOCKET



Code	Size (inches)
661 1/4	1/4
661 3/8	3/8
661 1/2	1/2

662

EUROPEAN SAFETY COUPLING
BSP FEMALE SOCKET



Code	Size (inches)
662 1/4	1/4
662 3/8	3/8
662 1/2	1/2

665

EUROPEAN SAFETY COUPLING
WITH HOSETAIL



Code	Size (mm)	Size (mm)
665 6	6	6
665 8	8	8
665 10	10	10
665 12	12	12

SYSTEM ACCESSORIES


Notes:

OB161 EUROPEAN SAFETY COUPLING MALE PLUG



Code	Size (inches)
OB161 00 003	1/2

00304 METAL INLINE BLOW GUN SAFETY PIPE (90MM-200MM-290MM)




Code	L	L1
00304 90	90	163
00304 200	200	273
00304 290	290	363

00315 METAL BLOW GUN EXTENSION



Code	Size (mm)
0031500001	90
0031500002	200
0031500003	290

Notes:

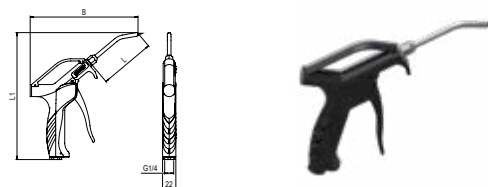

00362

BLOWGUN WITH 90MM STAINLESS STEEL SAFETY PIPE

Code	L	L1	B
003620001	90	213.5	185.5
0036000001	(without stainless steel safety pipe)		



2003/10/CE

Max 85 dBA
8hr @ 6 bar
6hr @ 8 bar



OSHA 1910.95 (b)

Max 90 dB 8hr



OSHA 1910.242 (b)

Max 30 PSI (2.1 bar) when blocked



PRESSURE RATING

12 bar (1.2 MPa)



TEMPERATURE TOLERANCES

- 10 °C
+ 80 °C



AIR FLOW

383 NI/min @ 6 bar - 500 NI/min @ 8 bar



NOISE

LAeq 78 dBA @ 6 bar



NOISE

LAeq 84 dBA @ 8 bar



GRIP FORCE

19.8 N @ 6 bar



BLOWING FORCE

3.4 N @ 6 bar

SYSTEM ACCESSORIES

Notes:

2020 REDUCING NIPPLE (TAPER)



Code	Size (inches)	
2020 1/4 3/8	1/4	3/8
2020 1/4 1/2	1/4	1/2
2020 3/8 1/2	3/8	1/2
2020 1/2 3/4	1/2	3/4
2020 3/4 1	3/4	1

2080 REDUCER (TAPER)



Code	Size (inches)	
2080 1/4 1/8	1/4	1/8
2080 3/8 1/8	3/8	1/8
2080 1/2 1/8	1/2	1/8
2080 3/8 1/4	3/8	1/4
2080 1/2 1/4	1/2	1/4
2080 1/2 3/8	1/2	3/8
2080 3/4 3/8	3/4	3/8
2080 3/4 1/2	3/4	1/2
2080 1 1/2	1	1/2
2080 1 3/4	1	3/4
2080 1 1/4 1/2	1 1/4	1/2
2080 1 1/4 1	1 1/4	1
2080 1 1/2 1	1 1/2	1
2080 2 1	2	1

3015 MALE PLUG (PARALLEL)



Code	Size (inches)
3015 3/8	3/8
3015 1/2	1/2

Notes:

3060 FEMALE BULKHEAD



Code	Size (inches)
3060 1/8	1/8
3060 1/4	1/4
3060 3/8	3/8
3060 1/2	1/2

6000 CENTRAL MALE Y 90°



Code	Size (inches)
6000 3/8	3/8
6000 1/2	1/2

2060 TAPER NIPPLE (3 PIECES)



Code	Size (inches)
2060 1/8	1/8
2060 1/4	1/4
2060 3/8	3/8
2060 1/2	1/2
2060 3/4	3/4
2060 1	1

SYSTEM ACCESSORIES

Notes:



6060
SLIDE VALVE

Code	Size (inches)
6060 1/8	1/8
6060 1/4	1/4
6060 3/8	3/8
6060 1/2	1/2



6068
GAS BALL VALVE
FEMALE TO FEMALE

Code	Size (inches)
6068 1/2	1/2
6068 3/4	3/4
6068 1	1
6068 1 1/4	1 1/4
6068 1 1/2	1 1/2
6068 2	2



6300
BALL VALVE
FEMALE TO FEMALE

Code	Size (inches)
6300 1/8	1/8
6300 1/4	1/4
6300 3/8	3/8
6300 1/2	1/2
6300 3/4	3/4



6310
BALL VALVE
MALE TO FEMALE

Code	Size (inches)
6310 1/8	1/8
6310 1/4 1/8	1/4 1/8
6310 1/4	1/4
6310 3/8	3/8
6310 1/2	1/2
6310 3/4	3/4

Notes:




90825

HOSE REEL

	908250001	908250003
Polyurethane tube	Int Ø 8mm Ext Ø 12mm	Int Ø 10mm Ext Ø 14mm
Tube length	9+1m	15+1m
Maximum pressure	15 bar (1.5 MPa)	15 bar (1.5 MPa)
Temperature range	-5°C to +40°C	-5°C to +40°C
Outlet fitting	1/4M	3/8M
Inlet fitting	N/A	N/A
Cut down size tube	1.5m	1.5m
Air	SI	SI
6 bar flow rate	450 NI/min	610 NI/min
Pack dimensions	390x330x230mm 4.5kg	500x450x255mm 8.0kg

ATTACHMENTS

- Metal swivel fixing bracket
- Automatic device to stop tube at chosen length. This device is easy to disconnect whenever you need tube in constant traction

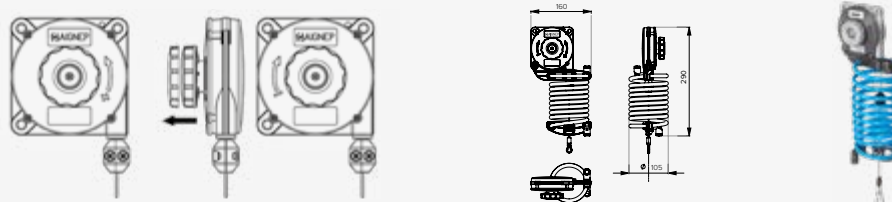

90826

HOSE BALANCER

	908260001	908260002	908260003
Capacity (kg)	0.4 ÷ 1	1 ÷ 2	2 ÷ 3
Stainless steel rope	Ø 0.2mm	Ø 0.2mm	Ø 0.2mm
Stroke rope	1600mm	1600mm	1600mm
Tube	Int Ø 8mm Ext Ø 10mm	Int Ø 8mm Ext Ø 10mm	Int Ø 8mm Ext Ø 10mm
Maximum pressure	10 bar (1 MPa)	10 bar (1 MPa)	10 bar (1 MPa)
Inlet/outlet fitting	Push-in fitting Ø 10mm	Push-in fitting Ø 10mm	Push-in fitting Ø 10mm
Cut down size tube	1m	1m	1m
Air	SI	SI	SI